

The KPD-TS03M-10 is a low-cost HMI device with touchscreen interface and 3.8" monochrome graphic display. The very compact size and the 1/4 VGA resolution make it the optimal solution for a tight budget without compromising quality and performance. Portrait mode (vertical mode) operation enhances the flexibility and makes the product suitable to even more application areas.

Features

- 3.8" monochrome display with white LED backlight
- 1/4 VGA (320x240 pixel) resolution
- Portrait mode operation
- Resistive touchscreen
- CANopen option
- 512 KB user memory



The KPD-TS03M-10 HMI panel is part of a family of touchscreen products from Baldor. All of the products support the rich common functionality of the operator panels. The KPD-TS03M-10 is mechanically compatible with the KPD-KG420-20 text display.

- Powerful and intuitive programming with the Designer 6 software
- Optional CANopen module
- Dual-driver communication capability
- Display dynamic data in numerical, text, bargraph and graphic image formats
- Recipe data storage. Recipe data can be transferred to a host computer using the Ethernet connection.
- Multilanguage applications. The number of runtime languages is limited only by the available memory. All text information in the application can be exported in Unicode format for easier translation.
- Powerful macro editor to configure touchscreen operation
- Alarms and historical alarm list. Alarm and event information can be printed or transferred to a host computer using the Ethernet connection.
- Eight level password protection.
- Report printing to serial printer. Reports are freely configurable using Designer.


Technical Data

Display	
Type	Monochrome LCD
Resolution	¼ VGA, 320x240 pixel
Active display area	3.8" diagonal (77x58 mm)
Colors	-
Backlight	White LED
Brightness	60 cd/m ² typ.
Dimming	No
Contrast regulation	Software
Memory	
User memory	512 KB Flash
User memory expansion	-
Front panel	
Touch screen	Analog resistive
Function keys	-
System keys	-
User LED's	-
System LED's	-
Interfaces	
PC/Printer port	-
PLC port	RS-232, RS-485, RS-422
Aux port (fieldbus and Ethernet)	Yes, with optional modules
DX port (video input)	No
Serial programming speed	9600 – 38400 bps
Functionality	
Vector graphics	No
Dual driver capability	Yes
Video input	No
Data acquisition and trends	No
Recipe memory	32 KB
Alarms	1024
Event list	256
Password	Yes
Hardware RTC	Yes, battery backed
Screen saver	Yes
Buzzer	-
Battery	3 V 270 mA Lithium, non rechargeable, user replaceable, model CR2430. Replace with same component or equivalent compatible with the operating temperature of the product.
Ratings	
Power supply voltage	24 V DC (18 to 30 V DC)
Current consumption	Max 0.4 A at 24 VDC
Fuse	Automatic
Weight	Approx 1 Kg
Environmental Conditions	
Operating temperature	0 to 50 °C
Storage temperature	-20 to +70 °C
Operating and storage humidity	5 – 85 % RH non-condensing
Protection class	IP65 (front panel)

The product is designed for installation in industrial environments in compliance with the regulations:

Emitted interference EN 61000-6-4, 2001
 Noise immunity EN 61000-6-2, 2001

Dimensions and Cutout

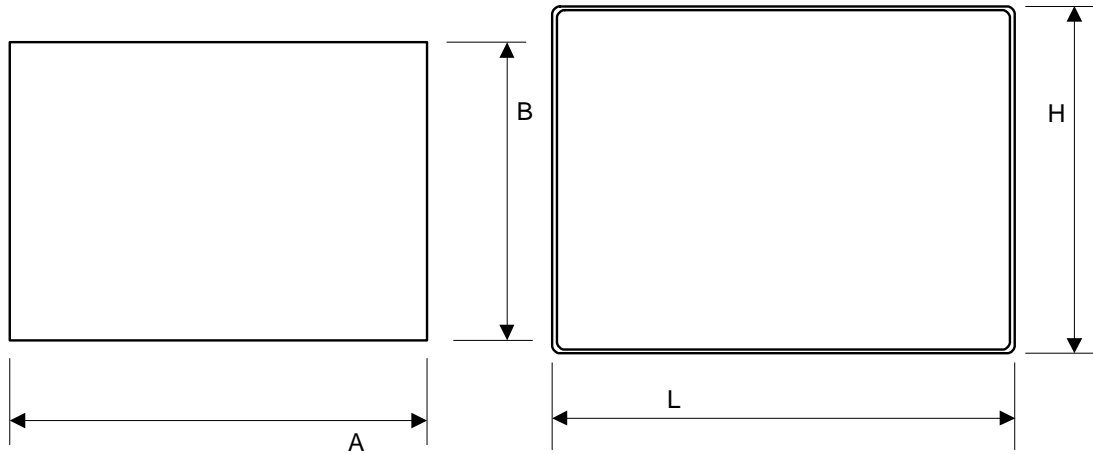

Faceplate LxH	149x109 mm (5.86x4.29")
Cut-out AxH	136x96 mm (5.35x3.78")
Mounting depth	61 mm (2.40")

Contact

World Headquarters (U.S.A.) Baldor Electric Company Tel: +1 479 646-4711 Fax: +1 479 648-5792 E-mail: sales.us@baldor.com	Australia Tel: +61 2 9674 5455 Fax: +61 2 9674 2495 E-mail: sales.au@baldor.com	China Phone: +86-21-5760 5335 Fax: +86-21-5760 5336 E-mail: sales.cn@baldor.com	Germany Tel: +49 89 905 08-0 Fax: +49 89 905 08-490 E-mail: sales.de@baldor.com
India Tel: +91 20 25 45 95 31/32 Fax: +91 20 25 45 95 30 E-mail: sales.in@baldor.com	Italy Tel: +41 91 640 9950 Fax: +41 91 630 2633 E-mail: sales.it@baldor.com	Japan Tel: +81 45-412-4506 Fax: +81 45-412-4507 E-mail: sales.jp@baldor.com	Korea Tel: +(82) 2 2226 9369 Fax: (82) 2 2226 9368 E-mail: DKim@baldor.com
Mexico Tel: +52 477 761 2030 Fax: +52 477 761 2010 E-mail: sales.mx@baldor.com	Switzerland Tel: +41 52 647 4700 Fax: +41 52 659 2394 E-mail: sales.ch@baldor.com	Singapore Tel: +65 6744 2572 Fax: +65 6747 1708 E-mail: sales.sg@baldor.com	Taiwan Tel: + (886) 4 238 04235 Fax: + (886) 4 238 04463 E-mail: AChen@baldor.com
United Kingdom Tel: +44 1454 850000 Fax: +44 1454 859001 E-mail: sales.uk@baldor.com			